



HAIVISION

Makito X4 Series

Makito X4 solutions from Haivision provide the following:

- Real-time video encoding, streaming and decoding
- Up to 4K UHD video resolutions
- Single and Quad HD video encoding and decoding with stream synchronization
- 4:2:2 chroma subsampling
- 10-bit pixel depths for wide color gamut and HDR
- 12G-SDI, 6G-SDI, 3G-SDI, and HD-SDI inputs and outputs
- SMPTE ST 2110 video, audio, and ancillary metadata inputs
- Native support for SRT streaming
- Rack-mounting in high density 1RU or 4RU chassis for up to 84 HD/21 UHD channels
- Compact, ruggedized and fanless options

The Makito X4 series of encoders and decoders are designed for the most demanding live low latency video applications, supporting up to four simultaneous 1080p50/60 HD video encodes or decodes. The Makito X4 Encoder and Decoder can also support up to 2160p50/60 4K UHD video resolutions with metadata and up to 32 channels of digital audio. Encode and decode live video in HEVC and H.264 over any IP network.

Makito X4 Video Encoder

The Makito X4 Video Encoder encodes live UHD/HD video from SDI or SMPTE ST 2110 sources as H.264 and HEVC streams at very low latency. As the original SRT encoder, the Makito X4 is ideal for live video applications requiring real-time collaboration such as field contribution, bidirectional interviews, return feeds, confidence monitoring, and remote production with synchronized multi-camera feeds. Always 4K capable, the Makito X4 encoder is available in single-channel or quad-channel HD configurations.



Makito X4 Video Decoder

The perfect companion to the Makito X4 Encoder, the Makito X4 Decoder provides low latency decoding for 4K, HD, and HDR video.



Capable of encoding and decoding video in real-time with 8- or 10-bit pixel depths, PQ and HLG transfer functions for HDR, and 4:2:0 or 4:2:2 chroma subsampling, Makito X4 Encoders and Decoders support the most demanding low latency end-to-end applications.

Featuring Haivision's unique Stream Sync technology, ensure synchronization of multiple IP streams based on timecode embedded by Makito X4 Encoders. Stream Sync supports multi-camera remote production of live video over IP networks including the internet, providing a cost-effective alternative to satellite and dedicated fiber networks and reduces the costs associated with deploying large teams of personnel & resources at remote event locations.

The Makito X4 Video Encoder and Video Decoder are both available as either an appliance or a blade and offer the highest density of video encoding and decoding available on the market with up to 84 HD or 21 UHD video channels within a single 4RU rack module.

Makito X4 Rugged Video Encoder

Designed for encoding within the most demanding environments, the Makito X4 Rugged delivers high-quality, low latency HEVC/H.265 and AVC/H.264 video from analog and digital sources with resolutions up to 3840x2160p60 (4K UHD).

The Makito X4 Rugged offers the flexibility to encode video from a broad range of video sensors using SDI inputs, including 12G-SDI for 4K sources, and 3G-SDI for HD sources. Compliance with KLV metadata standards ensures that interoperability is achieved within an all-weather MIL-STD-810G/DO-160 appliance.




Makito X1 Rugged Video Encoder

The Makito X1 Rugged is the smallest, lightest, and most power-efficient ruggedized video encoder on the market. With dual encoding cores, the Makito X1 can encode a single channel of HD 1080p60 or SD video with H.265/HEVC and H.264/AVC compression, and offers independent control of scaling, cropping, and encoding parameters.



Haivision EMS

The Haivision EMS software provides broadcast engineers and system administrators with a web-based interface for centrally managing a video streaming ecosystem based on Haivision encoders and decoders, across multiple sites.

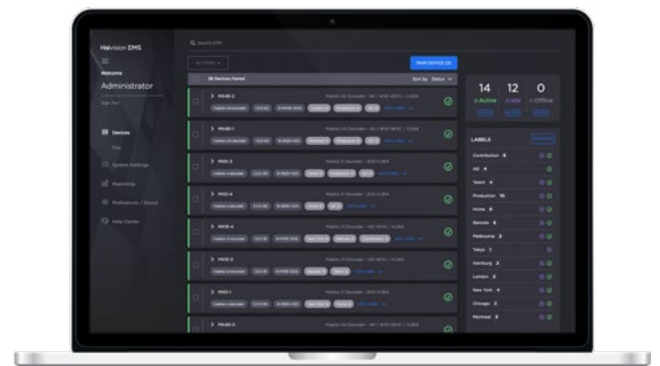



High Quality

Delivers pristine quality live encoded video, even at low bitrates, making it ideal for transport across any network including satellite or internet.



Ultra Low Latency

Ideal in applications where end-to-end latency must be as low as possible. Respond in real-time to mission-critical video information.



4K Broadcast Quality Video

Encode live video up to 4K/UHD for streaming over IP networks. Supporting up to 4:2:2 chroma sub-sampling and 10-bit pixel depths for wide color gamut and HDR workflows.



Next-gen Compression

Flexible encoding & compression, adapting to different network environments and applications. HEVC (H.265) options reduce bandwidth by up to 50% compared to H.264.



Remote Production with Stream Sync

Synchronize multi-camera workflows, providing a cost-effective alternative to deploying large teams of personnel & resources at remote event locations.



SRT

Assure pristine video quality, even when faced with packet loss, jitter, latency, and fluctuating bandwidth from unpredictable networks.



Secure

Secure end-to-end unicast or multicast video distribution & AES 128/256 bit encryption, plus dual network interfaces, a secure operating system, and support for IPv6.




Ruggedized and Fanless

Designed for demanding portable and space-constrained applications, ruggedized and fanless options stand up to high operating temperature environments.




KLV Metadata

Supports full-motion video requiring STANAG and MISP compliant Key-Length-Value (KLV) metadata.



High Density

Highly flexible deployment from ultra-compact appliance to 21 blade (4RU) chassis. Ideal where size, weight and power considerations are critical.

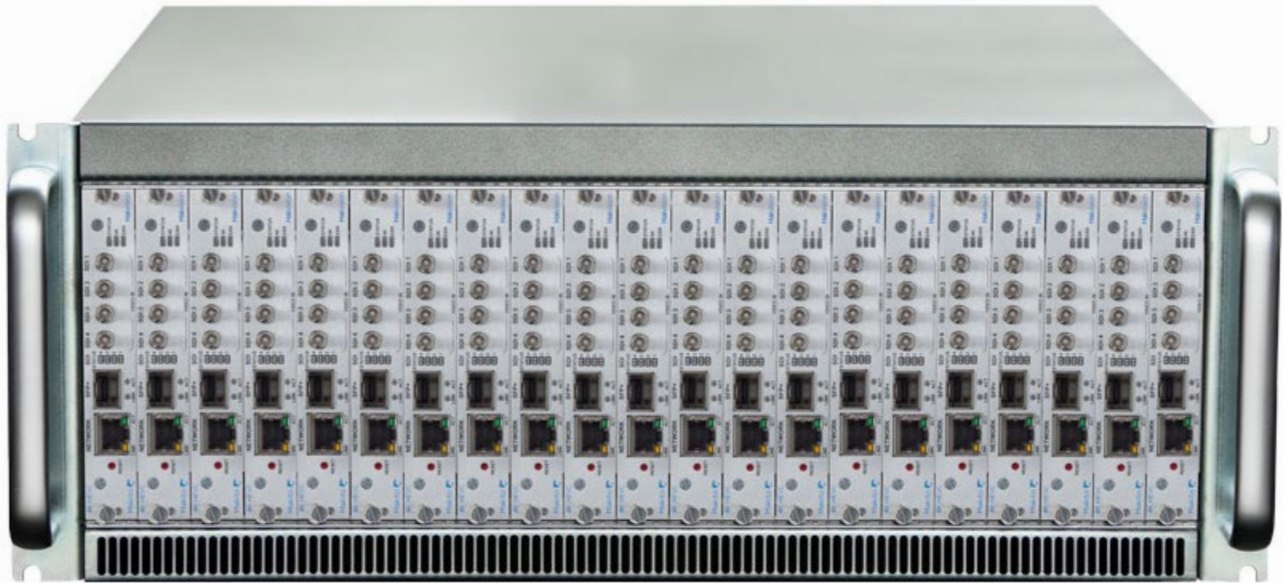

High Density, Flexible, and Scalable Chassis for Rack-Mounting Blades

Designed for high density deployment in server rooms or OB trucks, the MB series of chassis provide flexible and scalable solutions where rackmount installations are required and address any deployment – from single appliances up to the highest density possible in a 1RU or 4RU chassis. Haivision encoders and decoders are available as single product appliances or as independent mini blades.

High Density Multichannel Chassis

Haivision encoders and decoders are available as single product appliances or as independent mini blades. For installations where rack mounting is desired, Haivision offers a full range of rackmount kits to address any deployment – from single appliances up to the highest density possible in a 1RU or 4RU chassis.

MB6X High Density Six-Slot Chassis

The MB6X is designed to support fast deployments of Haivision's market-leading encoding/decoding systems in the most space constrained installations. The six-slot chassis can hold up to 6 Makito X4 blades, in just a single rack unit (1RU), making it the highest density system available. The MB6X is available with redundant AC power supplies so even if a single AC input or PSU fails, operation of the unit will not be interrupted.

MB21X High Density Twenty-One Slot Chassis

Designed for high density IP video encoding and decoding, the MB21X holds any combination of up to 21 Makito X4 products in a 7-inch rack (4RU) and also features replaceable fans and fully redundant power supplies. In addition, the MB21X provides a station alarm interface so as to notify operators when a power supply or fan failure has occurred. Redundant AC inputs and a field serviceable power supply allows the MB21X to continue operating even if an AC input is lost or a Power Supply Unit (PSU) fails.

Rackmounting Appliances

1RU or 2RU mounting brackets available for mounting one or two Makito X4 appliances (single or double height) in machine rooms racks.

| | Makito Encoders | | | Makito Decoders |
|--|-----------------|------------------|-----------|-----------------|
| | X1 Rugged | X4 Quad Single | X4 Rugged | X4 |
| CHANNELS | | | | |
| SD/HD | 1 | 4 1 | 4 | 4 |
| 4K UHD | | 1 | 1 | 1 |
| VIDEO INPUTS & OUTPUTS | | | | |
| | ENCODER INPUTS | | | DECODER OUTPUTS |
| ANALOG | | | | |
| Composite NTSC/PAL/PAL-M | • | | • | |
| SD-SDI | | | | |
| SMPTE 259M-C | • | • | • | • |
| HD-SDI | | | | |
| SMPTE 292M | • | • | • | • |
| SMPTE 274M | • | • | • | • |
| SMPTE 296M | • | • | • | • |
| 3G-SDI | | | | |
| SMPTE 424M (Level A Only) | • | • | | • |
| SMPTE 425M | • | • | • | • |
| 6G-SDI | | | | |
| SMPTE 2081 | | • | • | • |
| 12G-SDI | | | | |
| SMPTE 2082 | | • | • | • |
| UHD/4X3G-SDI | | | | |
| SMPTE 425-5 (2SI and SQD) | | Quad Only | • | • |
| SMPTE ST 2110 | | | | |
| MSA Compliant 10G SFP+ | | • | | |
| VIDEO RESOLUTIONS | | | | |
| 4K UHD | | | | |
| 3840x2160p 60/59.94/50 Hz | | † | † | † |
| 3840x2160p 30/29.97/25 Hz | | • | • | • |
| HD 1080 | | | | |
| 1920x1080p 60/59.94/50/30/29.97/25/24/23.98 Hz | • | • | • | • |
| 1920x1080i 60/59.94/50 Hz | * | * | * | * |
| HD 720 | | | | |
| 1280x720p 60/59.94/50 Hz | • | • | • | • |
| 1280x720p 30/29.97/25 Hz | • | • | • | • |
| SD | | | | |
| 720x480i 60/59.94 Hz | * | * | * | * |
| 720x576i 50 Hz | * | * | * | * |

† SDI inputs only

* HEVC only.

| | Makito Encoders | | | Makito Decoders |
|---|--------------------|--------------------|--------------------|--------------------|
| | X1 Rugged | X4 Quad Single | X4 Rugged | X4 |
| VIDEO ENCODING | | | | |
| VIDEO COMPRESSION | | | | |
| H.265/HEVC (ISO/IEC 23008-2) | • | • | • | • |
| H.264 (MPEG-4 AVC part 10 / ISO/IEC 14496-10) | • | • | • | • |
| High Profiles | | • | • | • |
| Baseline & Main Profiles | • | • | • | • |
| Up to Level 5.2 (UHD) and lower intermediate levels | | • | • | • |
| Up to Level 4.2 and lower intermediate levels | • | • | • | • |
| Up to Level 4 (1080p60) (HEVC) | • | • | • | • |
| 8-bit pixel depth | • | • | • | • |
| 10-bit pixel depth | | • | • | • |
| HDR Transfer Function (HLG/PQ) | • | • | • | • |
| 4:2:0 chroma sub-sampling | • | • | • | • |
| 4:2:2 chroma sub-sampling | | • | • | • |
| I, IP, IBBP framing | • | • | • | • |
| IBBBP, IBBBBP framing | | • | • | • |
| Configurable Group of Picture (GOP) size | • | • | • | |
| Configurable frame rate | • | • | • | • |
| Slice-Based Encoding | • | • | • | • |
| Bit Rates (max bitrate depends on configuration) | 32 kbps - 120 Mbps | 32 kbps - 120 Mbps | 32 kbps - 120 Mbps | 32 kbps - 120 Mbps |
| Rate Control | CBR/VBR | CBR/VBR | CBR/VBR | CBR/VBR |
| AUDIO I/O | | | | |
| EMBEDDED AUDIO | | | | |
| SD-SDI SMPTE 272M | • | • | • | • |
| HD/3G-SDI SMPTE 299M | • | • | • | • |
| ANALOG AUDIO | | | | |
| Stereo or Mono Input | • | | • | |
| AUDIO ENCODING/ DECODING | | | | |
| COMPRESSION STANDARD | | | | |
| MPEG-1 Layer 1/2/3 ISO/IEC 11172-3 | | | | • |
| MPEG-2 AAC-LC ISO/IEC 13818-7 | • | • | • | • |
| MPEG-4 AAC-LC ISO/IEC 14496-3 | • | • | • | • |
| AUDIO CHANNELS | | | | |
| Embedded Audio Sources (Stereo Pairs) | 8 | 32 8 | 32 | 32 |
| AUDIO BIT RATES | | | | |
| From 14 to 576 kbps per audio pair | • | • | • | • |
| FREQUENCY RESPONSE | | | | |
| From 20 Hz to 22 kHz | • | • | • | • |

| | Makito Encoders | | | Makito Decoders |
|--|-------------------|------------------|-------------------|-----------------|
| | X1 Rugged | X4 Quad Single | X4 Rugged | X4 |
| METADATA (OPTIONAL) | | | | |
| INPUT METADATA | | | | |
| KLV over SD-SDI/HD-SDI/3G-SDI | • | • | • | • |
| KLV or CoT over serial RS-232/422 | • | | • | |
| KLV or CoT over UDP/IP | • | • | • | |
| METADATA PROCESSING | | | | |
| CoT to KLV conversion | • | • | • | |
| CoT Relay | • | • | • | |
| Insertion and KLV edits | • | • | • | |
| CC 608/708 pass-through | • | • | • | • |
| SMPTE 336M compliant | • | • | • | • |
| MISB 0601.14 compliant | • | • | • | • |
| MISB 0604.2 compliant | • | • | • | • |
| Asynchronous & synchronous modes as per MISB 0604.2 | • | • | • | • |
| High precision timecode insertion as per MISB 0604.2 | • | • | • | • |
| SCTE 104 / SCTE 35 insertion markers | • | • | • | |
| IP NETWORK INTERFACES | | | | |
| STANDARD | | | | |
| Ethernet 10/100/1000 Base-T, auto-detect, Half/Full-duplex | • | • | • | • |
| IPv4 / IPv6 (Static & DHCP) | • | • | • | • |
| Interfaces | 1 Rugged | RJ45, SFP+ | 2 Rugged | RJ45, SFP+ |
| STREAMING PROTOCOLS | | | | |
| MPEG Transport Stream over UDP / RTP | • | • | • | • |
| Secure Reliable Transport (SRT) | • | • | • | • |
| RTSP (For specified devices) | • | • | • | |
| Unicast streaming | • | • | • | • |
| Multicast streaming (IGMP v3) | • | • | • | • |
| Multiple unicast streaming | • | • | • | • |
| Path Redundancy - SRT across multiple networks | • | • | • | |
| SAP (RFC 2974) | • | • | • | |
| MANAGEMENT INTERFACES | | | | |
| STANDARD | | | | |
| RS-232 Serial Interface | • | | • | |
| Ethernet | • | • | • | • |
| MANAGEMENT | | | | |
| HTTPS (web browser) | • | • | • | • |
| Command line | SSH/Telnet/RS-232 | SSH/Telnet | SSH/Telnet/RS-232 | SSH/Telnet |
| SFTP/TFTP/SCP | • | • | • | • |
| SNMP v3 | • | • | • | • |
| Haivision EMS | • | • | • | • |
| ONVIF API | • | • | • | |
| REST API | • | • | • | • |

| | Makito Encoders | | | Makito Decoders |
|--|-----------------|------------------|-----------|-----------------|
| | X1 Rugged | X4 Quad Single | X4 Rugged | X4 |
| ADVANCED FEATURES | | | | |
| Network Adaptive Encoding | • | • | • | |
| Multi-bitrate (MBR) streaming | • | • | • | |
| HD/SD de-interlacing | • | • | • | |
| Image Scaling | • | • | • | |
| EIA-608-B/NTSC Line 21 closed captioning | • | | • | |
| EIA-708-B/SDI closed captioning | • | • | • | • |
| Forward Error Correction (FEC) | • | • | • | • |
| AES encryption 128-bit or 256-bit with SRT | • | • | • | • |
| Aspect ratio configuration | • | • | • | |
| Active Format Description (AFD) | • | • | • | • |
| Wide Screen Signaling (WSS) | • | | • | |
| Timecode (ATC_VITC) | • | • | • | • |
| Image Cropping | • | • | • | |
| Image Filtering | • | • | • | |
| Bi-directional serial passthrough | • | | • | |
| Advanced Buffering Control | | | | • |
| Still Image Insertion | | | | • |
| Synchronized playback between decoders | | | | • |

Software Version

- Makito X1 Rugged Encoder: 1.2
- Makito X4 Encoder: 1.6
- Makito X4 Rugged Encoder: 1.6
- Makito X4 Decoder: 1.4

DoDIN APL Certified


Makito X4 Encoder is on the Department of Defense Information Network Approved Product List (DODIN APL) under tracking number 2118301.

| | Makito Encoders | | | Makito Decoders |
|-------------------------------|------------------------------|--------------------------|-----------------------|--------------------------|
| | X1 Rugged | X4 Quad Single | X4 Rugged | X4 |
| DIMENSIONS (H x W x D) | | | | |
| Millimeters | 30.5 x 72.5 x 90.2 | 24 x 152 x 192 | 68 x 146.2 x 185.7 | 24 x 152 x 192 |
| Inches | 1.20 x 2.85 x 3.55 | 0.94 x 5.98 x 7.56 | 2.675 x 5.755 x 7.31 | 0.94 x 5.98 x 7.56 |
| WEIGHT | | | | |
| kg | 0.372 | 1.08 | 1.93 | 1.08 |
| lbs | 0.82 | 2.37 | 4.25 | 2.37 |
| POWER | | | | |
| Blade/Appliance | 5VDC; 6W at 70°C, 5W at 40°C | 12VDC, 18W | 28VDC Nominal | 12VDC, 18W |
| APPLIANCE TEMPERATURE | | | | |
| Operating (°C) | -40°C to 70°C | 0°C to 40°C | -40°C to 70°C | 0°C to 40°C |
| Non-operating (°C) | -45°C to 85°C | -30°C to 70°C | -45°C to 85°C | -30°C to 70°C |
| Operating (°F) | -25°F to 160°F | 32°F to 104°F | -25°F to 160°F | 32°F to 104°F |
| Non-operating (°F) | -49°F to 185°F | -22°F to 158°F | -49°F to 185°F | -22°F to 158°F |
| HUMIDITY | | | | |
| % | up to 100% condensing | up to 95% non-condensing | up to 100% condensing | up to 95% non-condensing |


Rackmount Chassis

| | 6 Blade | | | 21 Blade |
|-------------------------------|---|---------------------------|---|--|
| | F-MB6X-RAC | F-MB6X-DC | F-MB6X-MED | F-MB21X-R |
| DIMENSIONS (H x W x D) | | | | |
| Rackmount Units | 19" 1RU | 19" 1RU | 19" 1RU | 19" 4RU |
| Millimeters | 44.07 x 440.004 x 420.4 | 44.07 x 440.004 x 420.4 | 44.07 x 440.004 x 420.4 | 177.29 x 441.35 x 461.92 |
| Inches | 1.735 x 17.323 x 16.55 | 1.735 x 17.323 x 16.55 | 1.735 x 17.323 x 16.55 | 6.980 x 17.376 x 18.186 |
| WEIGHT - EMPTY CHASSIS | | | | |
| kg | 7.94 | 7.94 | 7.94 | 14.52 |
| lbs | 17.5 | 17.5 | 17.5 | 32 |
| POWER | | | | |
| Internal Power Supply | 90-264 VAC 47Hz-63Hz 300 Watt max | 20-36 VDC 300 Watt max | 90-264 VAC 47Hz-63Hz 300 Watt max | 100-240 VAC 47Hz-63Hz 600 Watt max |
| APPLIANCE TEMPERATURE | | | | |
| Operating (°C) | 0°C to 50°C | 0°C to 50°C | 0°C to 50°C | 0°C to 50°C |
| Non-operating (°C) | -40°C to 70°C | -40°C to 70°C | -40°C to 70°C | -40°C to 70°C |
| Operating (°F) | 32°F to 122°F | 32°F to 122°F | 32°F to 122°F | 32°F to 122°F |
| Non-operating (°F) | -40°F to 158°F | -40°F to 158°F | -40°F to 158°F | -40°F to 158°F |
| HUMIDITY | | | | |
| % | up to 95% non-condensing | | | up to 95% non-condensing |


Encoders




Makito X4 Quad Encoder




Makito X4 Single-Channel Encoder

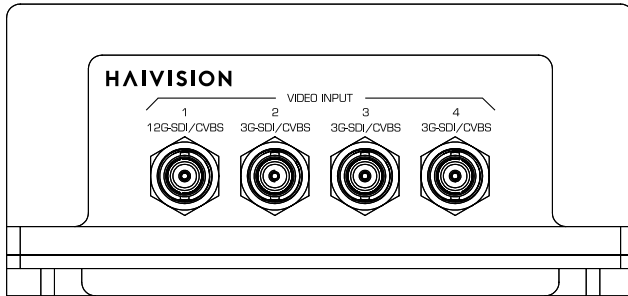

Makito X4 Rugged (Front)

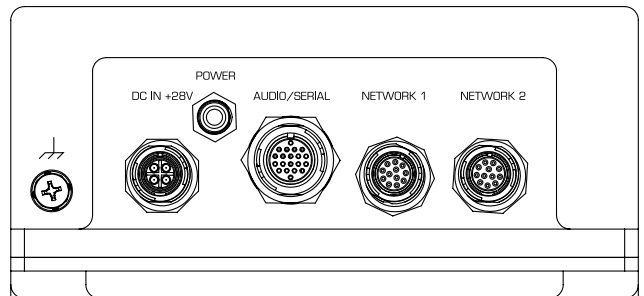


Makito X4 Rugged (Rear)




Makito X1 Rugged

Decoders




Makito X4 Decoder



MB1

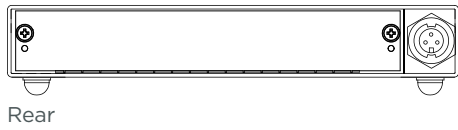


MB2

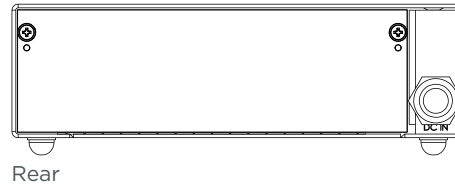


MB6X with DC Power Supply (MB6X-DC)

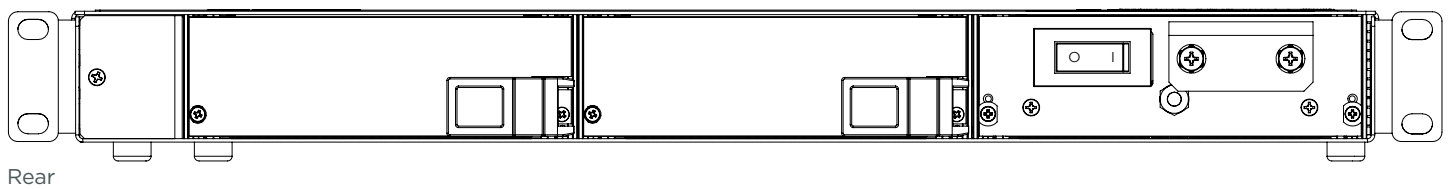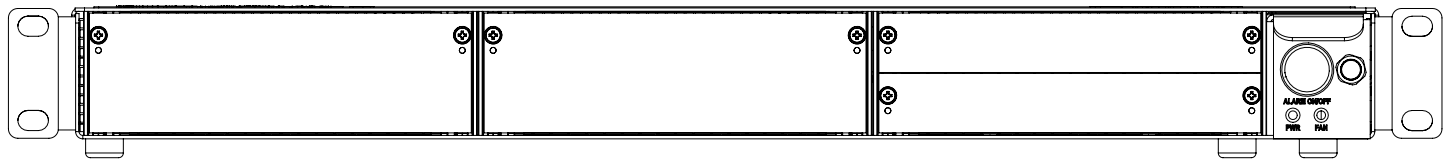


MB6X with Medical Power Supply (MB6X-MED)

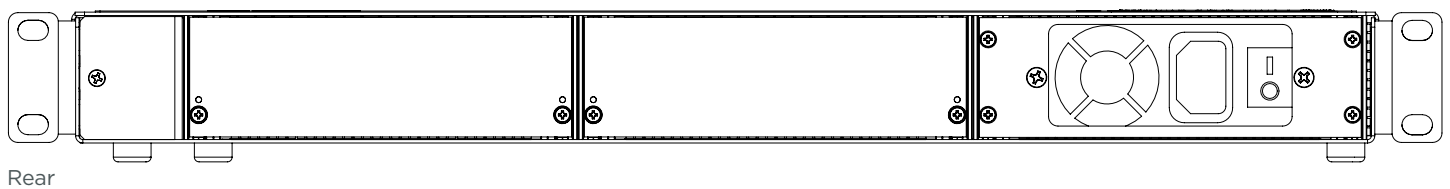

MB6X with Redundant AC Power (MB6X-RAC)

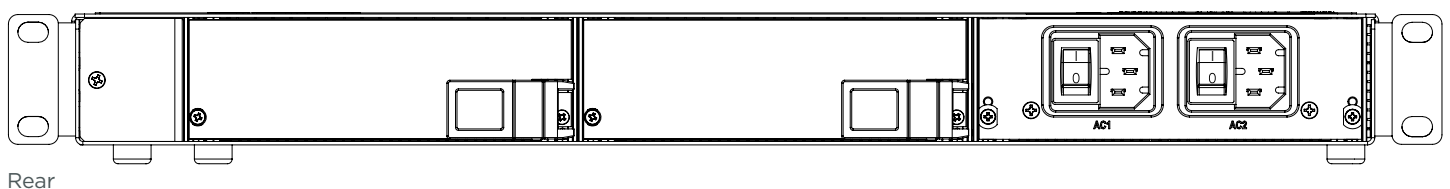

MB21X

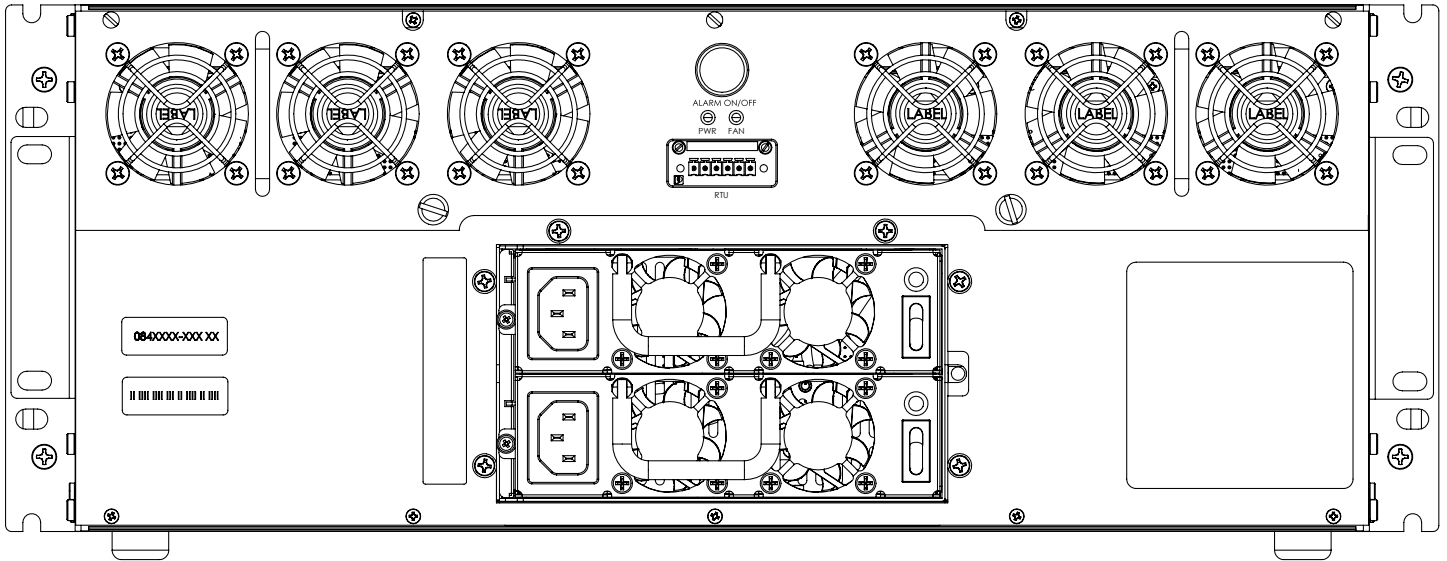

Rear - With dual power supplies, removable fans, and station alarm interface

| Product Name | SKU | Description |
|--|------------------------------|---|
| ENCODERS & DECODERS | | |
| Makito X4 Quad HD Video Encoder | S/B-MX4E-SDI4 | Makito X4 SDI Encoder Appliance (S) or Blade (B) - H.264/AVC & H.265/HEVC IP Video Encoder - Quad channel 3G/HD/SD-SDI with UHD support |
| Makito X4 4K UHD Quad HD Video Encoder | S/B-MX4E-SDI4-UHD | Makito X4 SDI Encoder Appliance (S) or Blade (B) - H.264/AVC & H.265/HEVC IP Video Encoder - Quad channel 3G/HD/SD-SDI with UHD support |
| Makito X4 4K UHD Single HD Video Encoder | S/B-MX4E-SDI1-UHD | Makito X4 SDI Encoder Appliance (S) or Blade (B) - H.264/AVC & H.265/HEVC IP Video Encoder - Single channel 3G/HD/SD-SDI with UHD support |
| Makito X4 HD Video Decoder | S/B-MX4D-SDI4 | Makito X4 quad-channel decoder appliance (S) or blade (B) |
| Makito X4 4K UHD Video Decoder | S/B-MX4D-SDI4-UHD | Makito X4 quad-channel decoder appliance (S) or blade (B) with UHD support |
| Makito X4 Rugged HD Encoder w/ Metadata | S-MX4E-R-SDI4-ISR | Makito X4 Rugged encoder with four inputs; up to 1920x1080p60; 8x AVC/H.264 or HEVC/H.265 encoding engines; with KLV metadata. |
| Makito X4 Rugged 4K UHD Encoder w/ Metadata | S-MX4E-R-SDI4-ISR-UHD | Makito X4 Rugged encoder with four inputs; up to 3840x2160p60; 8x AVC/H.264 or HEVC/H.265 encoding engines; with KLV metadata. |
| Makito X1 Rugged HD Video Encoder Appliance w/ Metadata | S-MX1E-R-SDI1-ISR | Makito X1 Rugged appliance encoder with single input; up to 1920x1080p60; 2x H.265/HEVC or H.264/AVC encoding engines; with KLV metadata. |
| Makito X1 Rugged HD Video Encoder Board w/ Metadata | B-MX1E-I-SDI1-ISR | Makito X1 board encoder with single input; up to 1920x1080p60; 2x H.265/HEVC or H.264/AVC encoding engines; with KLV metadata; no heatsink for OEM integration. |
| Makito X4 HDR License | SWO-MX4-HDR | Software license option – Support HLG and PQ (ST 2084) transfer function |
| Makito X4 ST 2110 License | SWO-MX4-2110 | Software license option – Enable SMPTE ST 2110 input with MSA compliant 10G SFP+ transceiver |
| RACKMOUNT KITS | | |
| 21 Slot Chassis with Dual Redundant AC for Makito X Blades | F-MB21X-R | Rackmount 4RU Chassis - Up to 21 Makito X4 mini-blades, Redundant Dual AC power supply, 100-240VAC 47Hz-63Hz, 600 Watt max. |
| 6 Slot Chassis Redundant AC | F-MB6X-RAC | 1RU Rackmount Chassis - Up to 6 Makito X4 mini-blades, Redundant AC power supply, 90-264VAC, 47Hz-63Hz, 300 Watt max. |
| 6 Slot Chassis DC | F-MB6X-DC | Rackmount 1RU Chassis - Up to 6 Makito X4 mini-blades, DC power supply, 2-36 VDC, 300 watt max. |
| 1RU appliance mounting bracket | RU-MB1-1 RU-MB1-2 | 1RU mounting bracket for one or two single-height appliance chassis |
| 2RU appliance mounting bracket | RU-MB2-1 RU-MB2-2 | 2RU mounting bracket for one or two double-height appliance chassis |

* For complete pricing and ordering, contact us at sales@haivision.com or your certified Haivision reseller.

Do you have specific OEM needs?

Contact us: info@haivision.com | 1-877-224-5445

HAIVISION

haivision.com